


Flange Yoke S with Clamping Sleeves

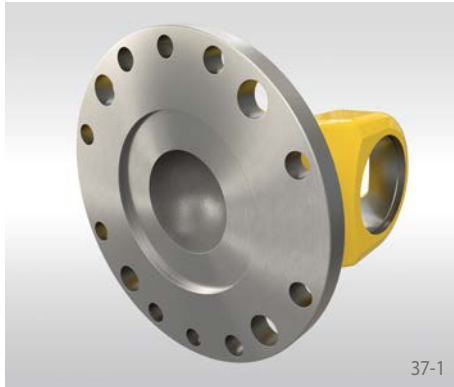

37-1


Features

Flange Yokes S with clamping sleeves have the same design as Flange Yokes B with frictional connection, although the Flange Yokes S have four additional bores for clamping sleeves.

Order Example

Flange Yoke	S
Option 1)	
Cardan Shaft Size	3053
Flange Yoke Diameter	9.84
Unit of Length	in
Short Designation	S-3053-9.84-in

1) Implementation of optional joint-side bolt insertion:
Yes = S or No = leave blank

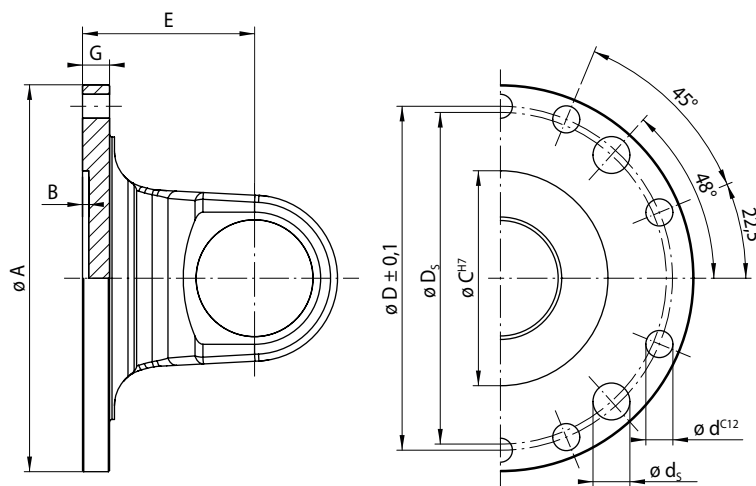

37-2

Cardan Shaft Size	Rotation Diameter K		Flange Yoke Diameter A		Centering Depth B		Centering Diameter C		Bolt Circle Diameter D		Bearing Center Distance E		Flange Thickness G		Bore Diameter d		No. of Bores	Bolt Circle Diameter D _S		Bore Diameter d _S		No. of Bores	JBI *
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch		mm	inch	mm	inch		
2065	198	7.80	225	8.86	5	0.20	140	5.51	196	7.72	110	4.33	16	0.63	16	0.63	8	192	7.56	21	0.83	4	o
			250	9.84	5	0.20	140	5.51	218	8.58	110	4.33	18	0.71	18	0.71	8	214	8.43	25	0.98	4	s
3052	225	8.86	250	9.84	6	0.24	140	5.51	218	8.58	125	4.92	18	0.71	18	0.71	8	214	8.43	25	0.98	4	s
3053	225	8.86	250	9.84	6	0.24	140	5.51	218	8.58	125	4.92	18	0.71	18	0.71	8	214	8.43	25	0.98	4	s
8050	225	8.86	250	9.84	6	0.24	140	5.51	218	8.58	125	4.92	18	0.71	18	0.71	8	214	8.43	25	0.98	4	s
3062	250	9.84	285	11.22	7	0.28	175	6.89	245	9.65	130	5.12	20	0.79	20	0.79	8	240	9.45	28	1.10	4	o
3065	286	11.26	315	12.40	7	0.28	175	6.89	280	11.02	140	5.51	22	0.87	22	0.87	8	270	10.63	30	1.18	4	o
3070	315	12.40	350	13.78	8	0.31	220	8.66	310	12.20	180	7.09	25	0.98	22	0.87	10	300	11.81	32	1.26	4	o
3075	355	13.98	390	15.35	8	0.31	250	9.84	345	13.58	290	11.42	28	1.10	24	0.94	10	340	13.39	32	1.26	4	s
3078	390	15.35	435	17.13	10	0.39	280	11.02	385	15.16	215	8.46	40	1.57	27	1.06	10	378	14.88	35	1.38	4	o

* JBI = Joint-side bolt insertion: s = available as standard, o = optionally available, n = not possible